


# OPTICAL COMPONENTS



## 第一表面反射鏡 FIRST SURFACE REFLECTIVE MIRROR



規格：  
 材料：BK 7 A等級  
 劃/挖：60-40 在BK-7  
 鍍膜：增強AL  
 反射率：90%  
 波長範圍：400-700nm

型號	Φ(mm)	t(mm)	平滑度
1235A	25.4	5.00	$\lambda/4$
1236A	25.4	6.35	$\lambda/10$
1239A	50.8	8.00	$\lambda/4$



## 準確空氣縫 PRECISION AIR SLIT



規格：  
 縫長：3.00.25毫米  
 材料：薄不繡鋼片襯底

型號	Silt Width W (micro)	Slit Thickness (mm)
3980	5.0±1	0.013mm
3981	10.0±1	0.013mm
3982	25.0±2	0.013mm
3983	50.0±3	0.013mm
3984	100.0±4	0.013mm
3985	150.0±4	0.013mm
3986	200.0±4	0.013mm

## 針孔 PRECISION PINHOLES

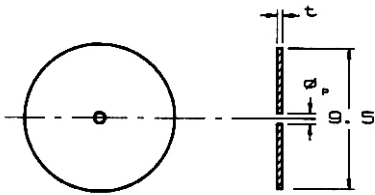

規格：  
 外部直徑：9.5毫米  
 材料：不繡鋼片

型號	Pinhole Diameter	Thickness(mm)t
3921	1 $\mu$ ±0.5 $\mu$	0.013mm
3922	2 $\mu$ ±0.5 $\mu$	0.013mm
3900	3 $\mu$ ±0.5 $\mu$	0.013mm
3901	4 $\mu$ ±0.5 $\mu$	0.013mm
3902	5 $\mu$ ±0.8 $\mu$	0.013mm
3903	6 $\mu$ ±0.8 $\mu$	0.013mm
3904	8 $\mu$ ±1.0 $\mu$	0.013mm
3905	10 $\mu$ ±1.0 $\mu$	0.013mm
3906	12 $\mu$ ±1.0 $\mu$	0.013mm
3907	15 $\mu$ ±1.5 $\mu$	0.013mm
3908	20 $\mu$ ±2.0 $\mu$	0.025mm
3909	25 $\mu$ ±2.0 $\mu$	0.025mm
3910	30 $\mu$ ±2.0 $\mu$	0.025mm
3911	40 $\mu$ ±3.0 $\mu$	0.025mm
3912	50 $\mu$ ±3.0 $\mu$	0.025mm
3913	75 $\mu$ ±3.0 $\mu$	0.025mm
3914	100 $\mu$ ±4.0 $\mu$	0.025mm
3915	150 $\mu$ ±6.0 $\mu$	0.051mm
3916	200 $\mu$ ±6.0 $\mu$	0.051mm
3917	400 $\mu$ ±8.0 $\mu$	0.051mm
3918	600 $\mu$ ±8.0 $\mu$	0.051mm
3919	800 $\mu$ ±8.0 $\mu$	0.051mm
3920	1000 $\mu$ ±10.0 $\mu$	0.051mm